



Peripheral Manufacturing, Inc.
4775 Paris St
Denver, CO 80239

Toll Free #: **1-800-468-6888**

PORTABLE AIR CONDITIONER QUOTATION AND BROCHURE

Thank you for contacting Peripherals.

Peripheral Manufacturing Inc. is a 26-year-old company specializing in Fire Suppression Equipment for Computer Rooms, Magnetic Media, Computer Room Air Conditioners, Tape Degaussers, Tape Storage Racks and Cases, CD/Disk/Credit Card Shredders, DLT Tape Labels, and Tape Duplication and Conversion.

**You cannot run a company without good employees.
Why would you want to purchase equipment without proper support?**

- Free Delivery in the US to your loading dock.
- Free delivery to the Borders of Canada and Mexico.
- 16 Month warranty on all Commercial Portable Air Conditioners
- Local onsite service during warranty, just call 1-800-468-6888
- **Temperature Sensor Alert** included free of charge. This device will email you if the temperature rises above a preset degree.
- Government and Educational discounts
- Multiple unit discounts

Call for Current Pricing on this unit.

Visit our web sites for more information or call at **1-800-468-6888**.

<http://Periphman.Com>

<http://Server-Room-Furniture.Com>

<http://Fire-Suppression-Systems.Com>

Picture and Specifications on Following Pages

Telephone: 303-371-8651

Toll Free #: **800-468-6888**

Fax: 303-371-8643



Peripheral Manufacturing, Inc.
4775 Paris St
Denver, CO 80239

Toll Free #: 1-800-468-6888



Classic 26 Portable Air Conditioner

Features

- Digital temperature control ... set the desired temperature and walk away.
- Totally self-contained with no costly installation necessary
- Handles temperatures up to 113°F ... provides cooling in the hottest environments.
- Provides up to 24,000 Btu/h of cool air... maximum cooling to just the spot that needs it.

Portable Indoor & Outdoor Cooling Units

Cooling for Only the Hotspots That Need It

The MovinCool Classic Plus 26 portable air conditioner has all the benefits of our proven Classic Series, PLUS new features designed to increase performance and control. The versatile Classic Plus portable AC is ready to provide instant cool air in the hottest environments such as production lines, outdoor events, manufacturing processes, injection molding, metal forming and much more. In addition, accessories for this unit can be added so that it provides both cool air and dehumidification to safeguard against damaging heat and humidity.

The Classic Plus features a programmable digital temperature controller that allows the user to "set" the desired temperature. By cooling only the area that needs it, the Classic Plus 26 portable air conditioner saves you money while protecting people and equipment and speeding up processes. Self-contained and portable, the Classic Plus 26 requires little or no installation—simply roll it in, plug it in and turn it on.

For outdoor cooling, please also see the Classic 40 and Classic 60 models. When instant, cost-effective spot cooling is a must, depend on MovinCool portable solutions.

** Exhaust duct required in most cases.

Telephone: 303-371-8651

Toll Free #: 800-468-6888

Fax: 303-371-8643



SPECIFICATIONS

Electronic Features	Control Panel	Programmable
	Thermostat Control	Electronic
Cooling Capacity	Rating Conditions: 95F at 60% RH	24,000 Btu/h
Electrical Characteristics	Voltage Requirement	1 Phase, 208/230V
	Total Power Consumption	3.1 kW
	Current Consumption	15.6/14.0 amps
	Recommended Fuse Size	20 amps
	NEMA Plug Configuration	6-20
	Min.Max. Voltage	198 - 250
Fans	Motor Output	0.55/0.38 kW
Evaporator	Fan Type	Centrifugal
	Max.Air Flow high/low	708/600 CFM
	Max. External Static Pressure	0.54 IWG
Condenser	Fan Type	Centrifugal
	Max.Air Flow high/low	1680/1460 CFM
	Max. External Static Pressure	0.25 IWG
Compressor	Type	Hermetic Scroll
	Output	1.6 kW
Refrigerant	R-22/R-410A	1.87 lb
Dimensions	W x D x H	19 x 29 x 47 in
Net Weight/ Shipping Weight		235/265 lb
Power Cord	Gauge	12 AWG (3 core)
	Length	6 ft
Condensate Tank Capacity		5 gal




Operating Conditions	Min. Max. (@ 50% RH)	70° - 113°F
Max. Duct Length	Per Cold Duct Hose	60 ft
	Hot Duct Hose	45 ft
Max. Sound Level	With Condenser - Duct high/low	66/64 dB(A)
	Without Condenser - Duct high/low	69/67 dB(A)

* Specification information shown with 230V.

NOTE: All specifications subject to change without notice.

Accessories

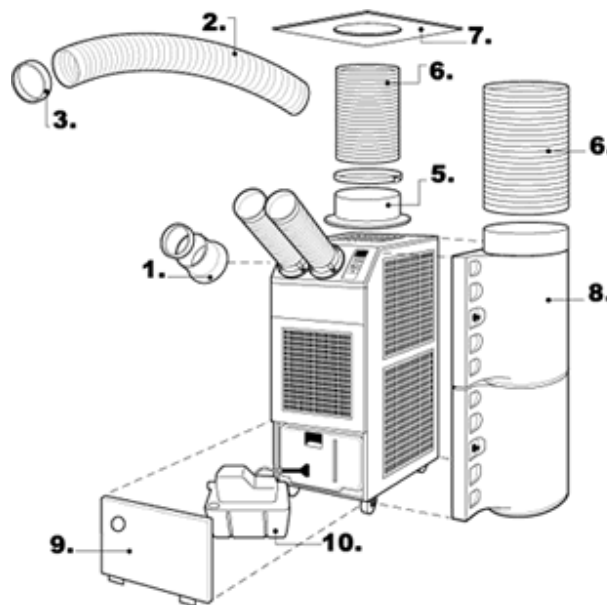

No. Part Name	Classic Plus 26 - Part Description	Part Number
1. Cold Air Flange Kit	6" diameter white metal flange with wire clamp and mounting screws. Use with cold air ducts.	481170-0250
2. Cold Air Extension Duct	6" adjustable diameter, white plastic duct that extends from 6-1/2' to 10' in length.	481744-0030
3. Trim Ring	6" diameter black plastic ring mounts as end caps for extension duct.	481851-0210



Peripheral Manufacturing, Inc.
4775 Paris St
Denver, CO 80239

Toll Free #: 1-800-468-6888

- | | | | |
|-----|------------------------------|---|---------------|
| 5. | Warm Air Flange Kit | 12" diameter gray metal flange with wire clamp and mounting screws. | 481170-0191 |
| 6A. | Warm Air Flexible Duct Kit | 12" diameter wire-reinforced, accordion-style duct in 10' length for condenser exhaust. Includes clamp. | LAY45771-0060 |
| 6. | Warm Air Self Supported Duct | 12" diameter white, plastic duct that extends 6-1/2' to 10' in length | 481744-0060 |
| 7. | Ceiling Tile | 24" x 24" white tile with 12" hole for warm air self-supported duct. | LA146373-8280 |
| 8. | Air Plenum | White plastic plenum, hinged for filter cleaning. | LAY84270-0030 |
| 9. | Cover Plate | Blue metal plate covers condensate collection area. | 484009-0480 |
| 10. | Condensate Pump Kit | 220V pump kit includes 3/8" diameter x 20' length hose and installation hardware. | LA484789-0090 |